

## HD24 Series Overview

### Description

The HD24, provides HD-SDI communication in combination with 24, 2 amp connections. RG179 coax cable is provided for video transfer. The coax cable is supplied terminated with BNC connectors, ready to install.



### Features

- Frequency rate:DC-2.3GHz
- Gold-on-gold contacts
- Available with one coax, and 24x 2 amp connections
- RG179(impedance 75Ω)

### Typical Applications

- Security cameras
- Rotating video displays
- Camera jibs
- Pan / tilt video camera heads
- Medical equipment

### Specifications

Item	
Operating Speed	Max.250 RPM*
Number of Circuits	1x HD-SDI + 24x 2A
Lead Wire	RG179 Coax cable, AWG28# Teflon, 300mm
Voltage	240V AC/DC
Operating Temperature	-20℃ to 60℃
Current Rating	Signal / 2A circuits
Noise	<0.01Ω
Torque	0.02N.m
Housing Material	Plastic
Protection Grade	IP51

\* Please note that the operational life of the unit is dependent upon rotational speed, environment and temperature

### Options


- Flange / No flange.
- Specified connectors and Heat-shrink tube.
- Longer lead lengths available.
- Ethernet, USB, HDMI data transmission are available.
- Hybrid Pneumatic/hydraulic and electric slip ring can be mixed.

# INTRODUCE

## HD24

2

### HD24 Series Dimensions

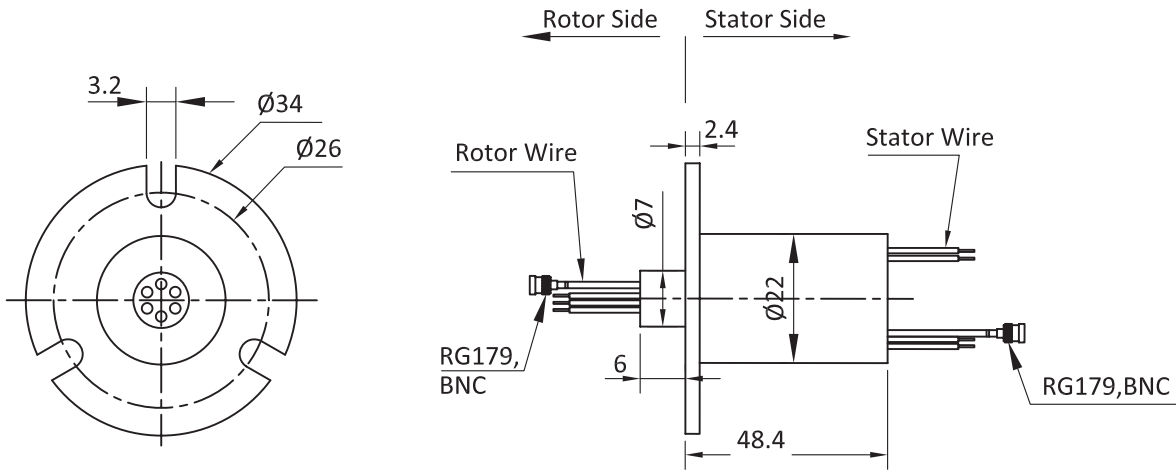

**Notes:**

- 1. Drawings not actual size, dimensions are in millimeters

### Part# List

Model#	Coax Cable	Signal (2A)	Voltage(V)	OD(mm)	Length(mm)
Hd24	1	24	240	22	48.4

### Lead wire color code(From the rotor)

Ring#	Color	Description/AWG	Ring#	Color	Description/AWG
1	BLK	Signal / 2A, AWG28#	7	BLU	Signal / 2A, AWG28#
2	BRN		8	VIO	
3	RED		9	GRY	
4	ORN		10	WHT	
5	YEL		11	PINK	
6	GRN		12	SOFT-BLU	

**Notes:**

12 wires for 1 group color, from 12~24 circuits would repeat the same color.