

STR215 Series Overview

Description

A slip ring can be used in any electromechanical system that requires unrestrained, continuous rotation while transferring power and / or data from a stationary to a rotating structure. A slip ring is also called a rotary electrical interface, electrical collector, swivel, or a rotary joint.

The STR215 series slip ring with 15mm hole for installation, and compact 32.6mm outside diameter for minimal space applications



Specifications

Item	
Operating Speed	Max.250 RPM*
Number of Circuits	12,24 wires
Lead Wire	AWG28# 250mm
Voltage	240V AC/DC
Operating Temperature	-20 º to 60 º
Current Rating	Signal / 2A circuits
Noise	<0.01Ω
Torque	0.02N.m
Housing Material	AL Alloy
Protection Grade	IP51

* Please note that the operational life of the unit is dependent upon rotational speed, environment and temperature

Options


- Flange or non-flange
- Longer lead lengths are available
- Hybrid Pneumatic/hydraulic and electric slip ring can be mixed.
- Terminal and heat-shrink tube are optional

INTRODUCE

STR215

2

STR215 Series Dimensions

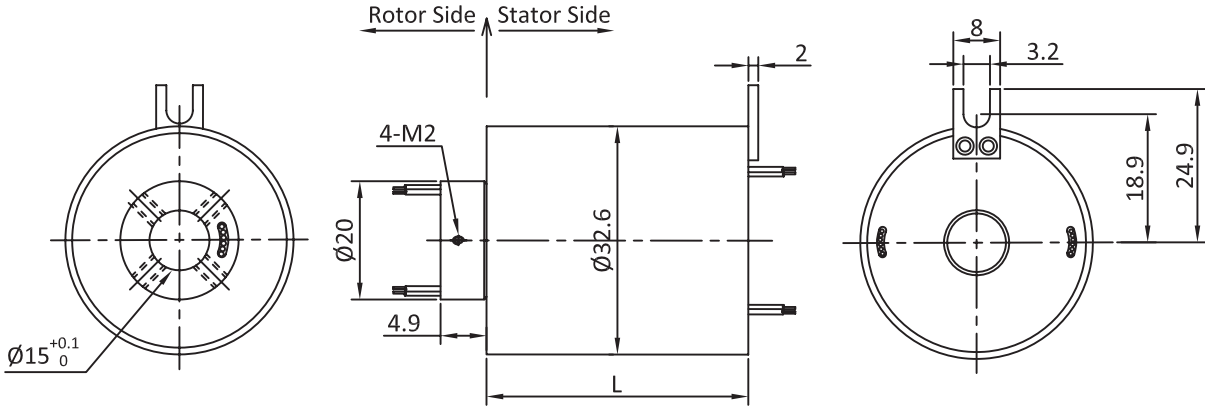

Notes:

- 1. Drawings not actual size, dimensions are in millimeters

Part# List					
Model#	Power Circuits(5A/10A)	Signal (2A)	Voltage(V)	OD(mm)	Length(mm)
STR215-S12	-	12	240	32.6	26.7
STR215-S24	-	24	240	32.6	41.7

Lead wire color code(From the rotor)					
Ring#	Color	Description/AWG	Ring#	Color	Description/AWG
1	BLK	Signal / 2A, AWG28#	7	BLU	Signal / 2A, AWG28#
2	BRN		8	VIO	
3	RED		9	GRY	
4	ORN		10	WHT	
5	YEL		11	PINK	
6	GRN		12	SOFT-BLU	

Notes:

12 wires for 1 group color, from 12~24 circuits would repeat the same color.