

## STR70 Series Overview

### Description

The through-bore provides routing space for hydraulics, pneumatics or for a concentric shaft mount.

The STR70 with 70mm through hole, 158mm OD, uses our unique fiber brush technology which offers several advantages over conventional slip ring contacts, including multiple points of contact per brush bundle, low noise, electrical and low contact wear rates. It can transmit signal(2A), 10A, multiple 10A current when 360° degree free rotating.



### Specifications

Item	
Operating Speed	Max.300 RPM*
Number of Circuits	2~108 wires
Lead Wire	AWG22#, AWG16# Teflon, 300mm
Voltage	600V AC/DC
Operating Temperature	-40℃ to 80℃
Current Rating	Signal / 5A, 10A circuits
Noise	<0.01Ω
Torque	0.1N.m; +0.03N.m/6rings
Housing Material	Al alloy
Protection Grade	IP51

\* Please note that the operational life of the unit is dependent upon rotational speed, environment and temperature


### Options

- Flange with 4 mounting holes
- Splash seals for dust and moisture resistance
- Various axial and radial lead exits are available
- Longer lead lengths are available
- Higher current and voltage capacity per circuit
- Support mixed high speed data transmission
- Hybrid Pneumatic/hydraulic and electric slip ring can be mixed.
- Aviation plug, terminal and heat-shrink tube are optional
- IP 65 rated slip ring available

# INTRODUCE

## STR70

### STR70 Series Dimensions

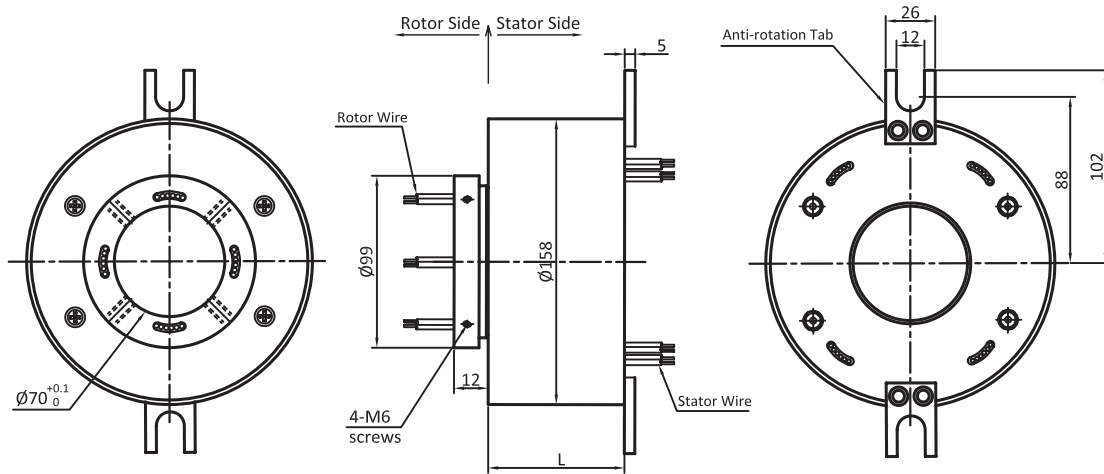

#### Notes:

1. Drawings not actual size, dimensions are in millimeters
2. Rotor and stator leads exit 4 places, 90° apart
3. Flange mounting is options

### Part# List

Model#	Power(10A)	Signal or 5A	Length(mm)	Model#	Power(10A)	Signal or 5A	Length(mm)
STR70-P2	2	0	45	STR70-S24	0	24	128.6
STR70-S2	0	2	45	STR70-P24	24	0	128.6
STR70-P3	3	0	48.8	STR70-P6S24	6	24	151.4
STR70-P2S2	2	2	52.6	STR70-P18S12	18	12	151.4
STR70-P4	4	0	52.6	STR70-P30	30	0	151.4
STR70-S6	0	6	60.2	STR70-S30	0	30	151.4
STR70-P6	6	0	60.2	STR70-S36	0	36	174.2
STR70-P12	12	0	83	STR70-P12S24	12	24	174.2
STR70-S12	0	12	83	STR70-P36	36	0	174.2
STR70-P2S10	2	10	83	STR70-S42	0	42	201
STR70-P4S8	4	8	83	STR70-P6S36	6	36	201
STR70-P6S6	6	6	83	STR70-S48	0	48	223.8
STR70-P6S12	6	12	105.8	STR70-P12S36	12	36	223.8
STR70-P18	18	0	105.8	STR70-S56	0	56	254.2
STR70-S18	0	18	105.8	STR70-P6S50	6	50	254.2
STR70-P10S8	10	8	105.8	STR70-P12S44	12	44	254.2
STR70-P06S18	6	18	128.6	STR70-P6S54	6	54	269.4
STR70-P12S12	12	12	128.6	STR70-S72	0	72	315

**Notes:** Not all of the part number are list in this table, if can not find suitable products, please contact us!

#### Lead wire color code(From the rotor)

Ring#	Color	Description/AWG	Ring#	Color	Description/AWG
1	RED	Signal / AWG22# 10A / AWG16#	7	RED	Signal / AWG22# 10A / AWG16#
2	BLK		8	BLK	
3	BLU		9	BLU	
4	BRN		10	BRN	
5	WHT		11	WHT	
6	GRY		12	GRY	

#### Notes:

6 wires for 1 group color, from 7~12 circuits would repeat the same color.